

Macro lens for 4k line scan cameras, magnification 0.500x, F mount



SPECIFICATIONS

Optical specifications

| | | |
|---------------------------------------|-------------------|---------------|
| Magnification | (x) | 0.500 |
| Magnification Range | (x) | 0.455 - 0.545 |
| Image circle | (mm) | 28.7 |
| Max sensor size | | 4k, APS-C |
| Working distance ¹ | (mm) | 189.9 |
| Focal length | (mm) | 78 |
| f/N | | 6.8 |
| wf/N^2 | | 10 |
| Distortion typical (max) ³ | (%) | < 0.04 (0.08) |
| Field depth ⁴ | (mm) | 4.2 |
| Resolution (max) ⁵ | (μm) | 13.0 |

Mechanical specifications

| | | |
|--------------------------------|------|-------------|
| Mount ⁶ | | F |
| Filter thread | | M30.5 x 0.5 |
| Phase adjustments ⁷ | | Yes |
| Length ⁸ | (mm) | 99.5 |
| Outer diameter | (mm) | 64.0 |
| Mass | (g) | 538 |

¹ Working distance: distance between the front end of the mechanics and the object. Set this distance within $\pm 3\%$ of the nominal value for maximum resolution and minimum distortion.

² working f/N : the real f/N of a lens in operating conditions.

KEY ADVANTAGES

Macro design

Achieve unmatched resolution in critical applications: these objectives consistently deliver superior image quality than standard fixed focal length lenses used with extension tubes.

Exceptional low distortion

Perform measurement tasks with a high degree of accuracy and reliability.

Optimized aperture

For each magnification, the $F/\#$ is optimized to ensure the best field depth and image resolution.

Easy front filter insertion

Thanks to the front M30.5x0.5 thread

MC4K series is a collection of macro lenses fitting both 4 K line scan cameras and matrix detector cameras over 4/3". These lenses are specifically designed for macro imaging, as opposed to infinite conjugate lenses with added spacers, a common alternative unable to deliver the same optical performance.

FIELD OF VIEW

| Sensors | (mm) |
|--|---------------|
| Line - 2k x 5 μm (10.24 mm) | 20.48 |
| Line - 2k x 5 μm (14.34 mm) | 28.68 |
| APS-C IMX342 (23.36 x 16.77 mm x mm) | 46.72 x 33.54 |
| Line - 2k x 5 μm (20.48 mm) | 40.96 |
| Line - 2k x 5 μm (28.67 mm) | 57.34 |

³ Percent deviation of the real image compared to an ideal, undistorted image. Typical (average production) values and maximum (guaranteed) values are listed.

⁴ At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 7 μm .

⁵ Object side, calculated with the Rayleigh criterion with $\lambda = 520 \text{ nm}$

⁶ FD stands for Flange Distance (in mm), defined as the distance from the mounting flange to the camera detector plane.

⁷ Indicates the availability of an integrated camera phase adjustment feature.

⁸ Measured from the front end of the mechanics to the camera flange.


COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.


All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.

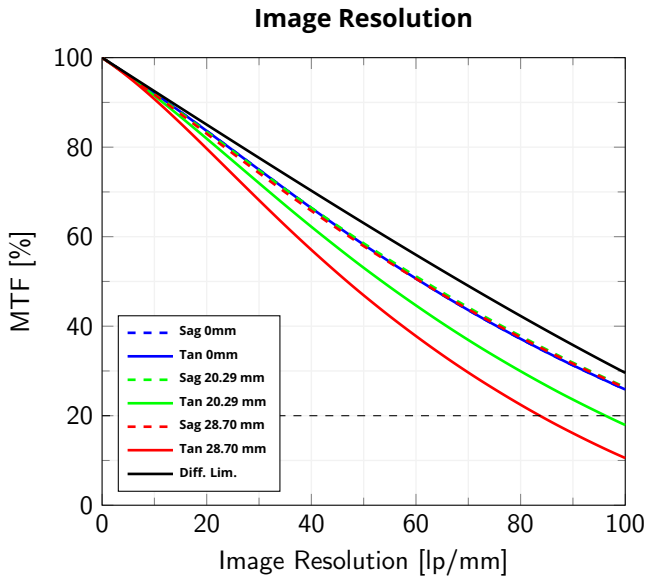


Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm. Fields in legend are represented as distance from the optical axis to the corner of the field of view

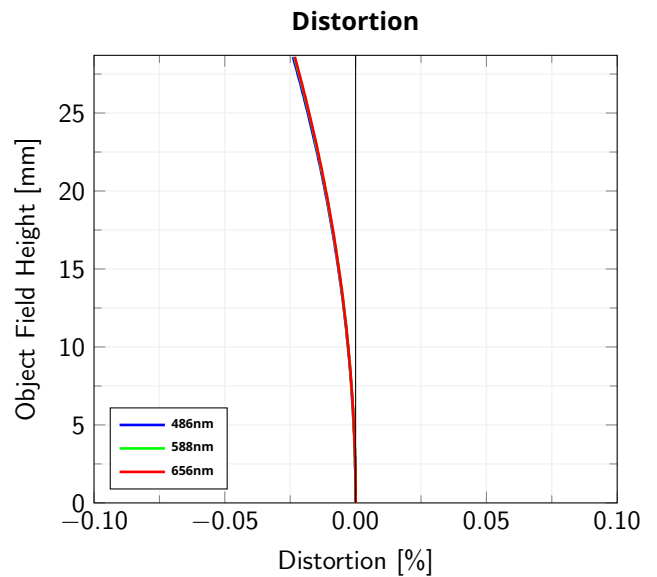

Object Field Height vs. Distortion, from the optical axis to the corner of the field of view

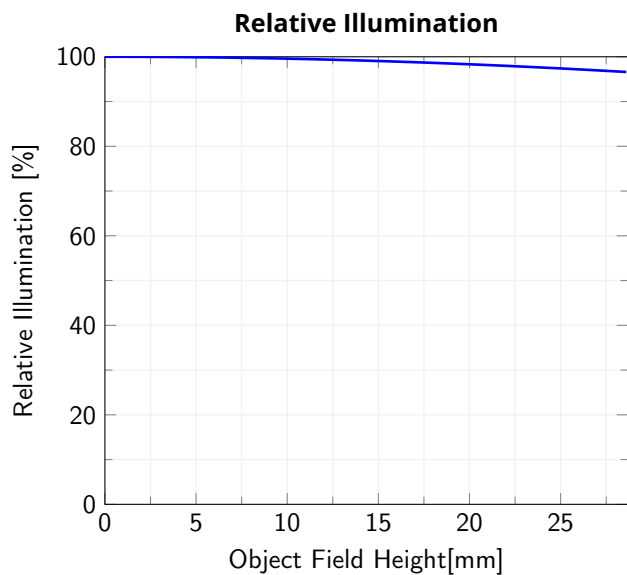

Relative illumination vs. Object Field Height, from the optical axis to the corner of the field of view

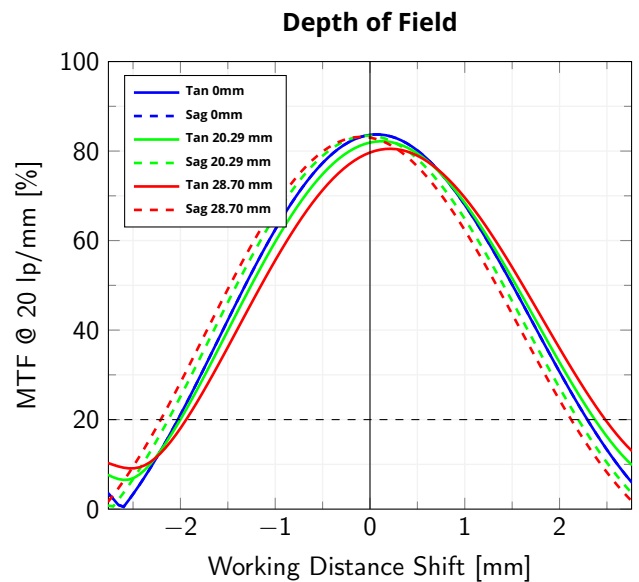

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus Working Distance, wavelength range 486 nm - 656 nm. Fields in legend are represented as distance from the optical axis to the corner of the field of view

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.